

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

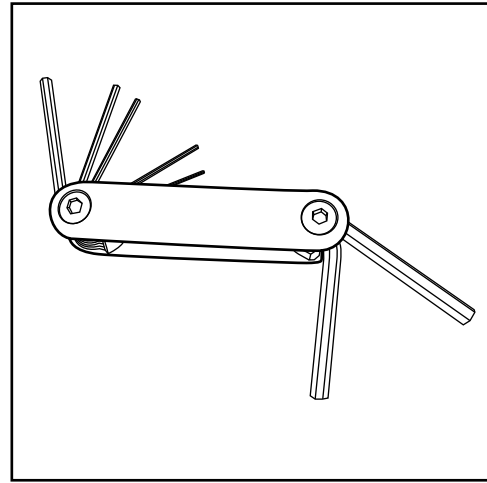


Hex Tool - Essential for Assembly

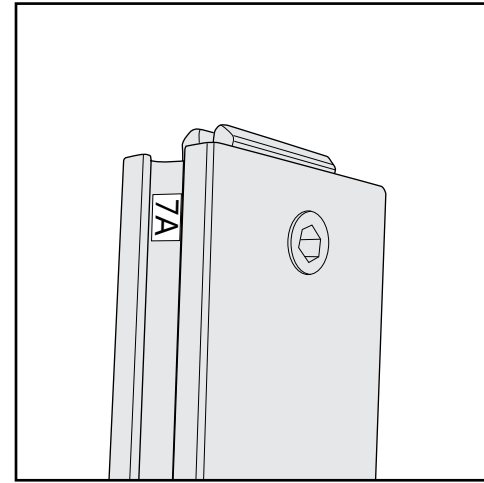


Part Identification - Numbering

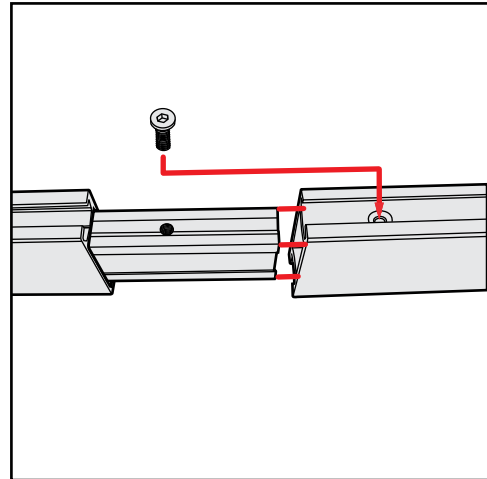


Spline Connection

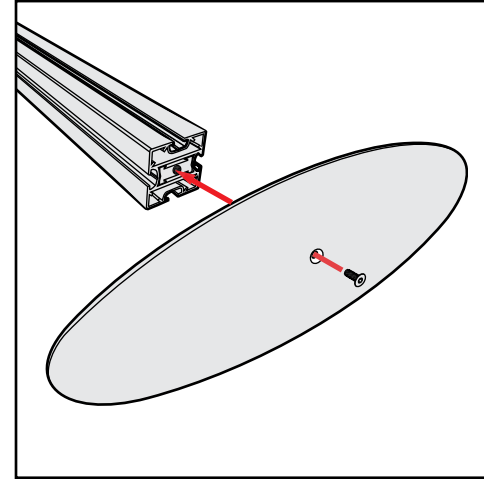

Base Plate & Extrusion Connection

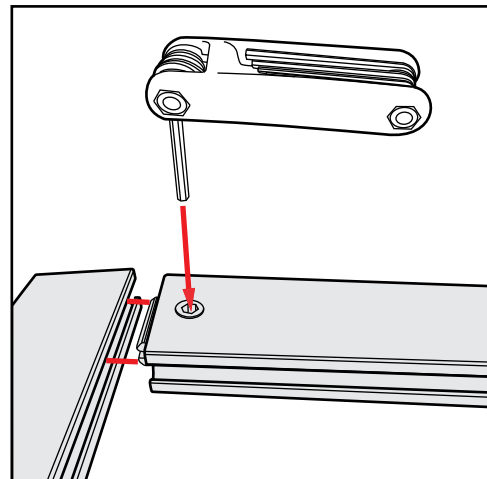

Extrusion & Lock Connection

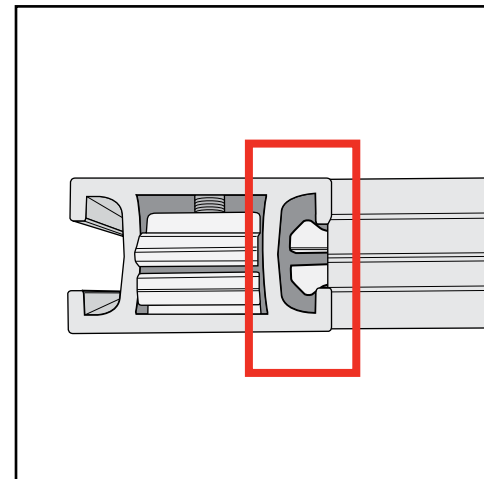


Engaged Lock



WARNING



DO NOT USE POWER TOOLS



LADDERS OR LIFTS
MAY BE REQUIRED



ALL CONNECTIONS MUST
BE TIGHTLY SECURED




Side-by-Side Assembly

- 1) Frames: Place frames side-by-side with one higher than the other, then slide panel down to lock panels securely together.
- 2) Corner Connectors: Repeat Step 1 for installing corner connectors to frames.

Side-by-Side Disassembly


- 1) Pull pin lock outwards to disengage.
- 2) Pull frames upward and apart at the same time to detach.

Assembly

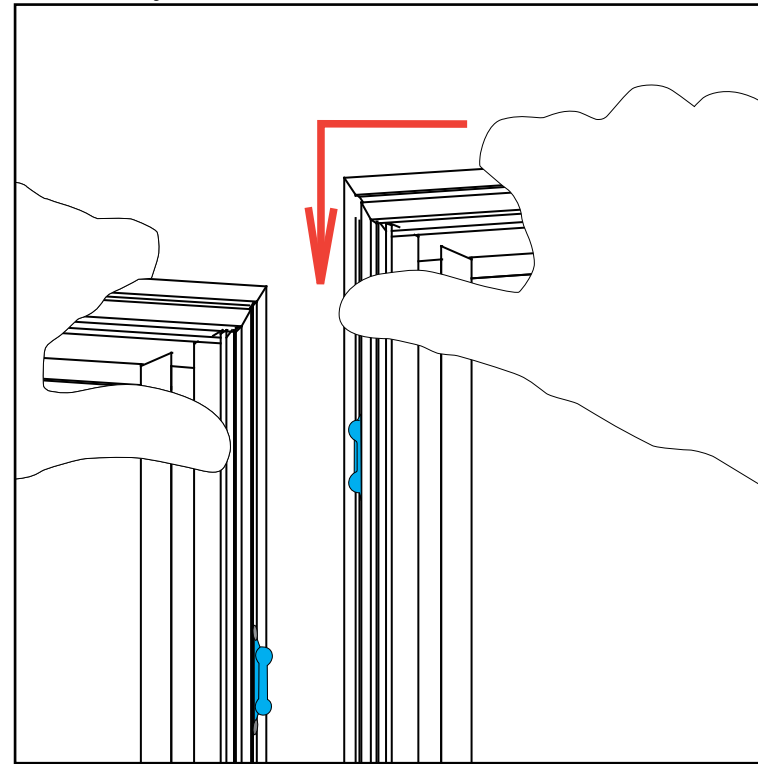


Assembly Cont'd

Push pin lock into hole of connecting frame.
Note: Block of pin lock will secure in groove.

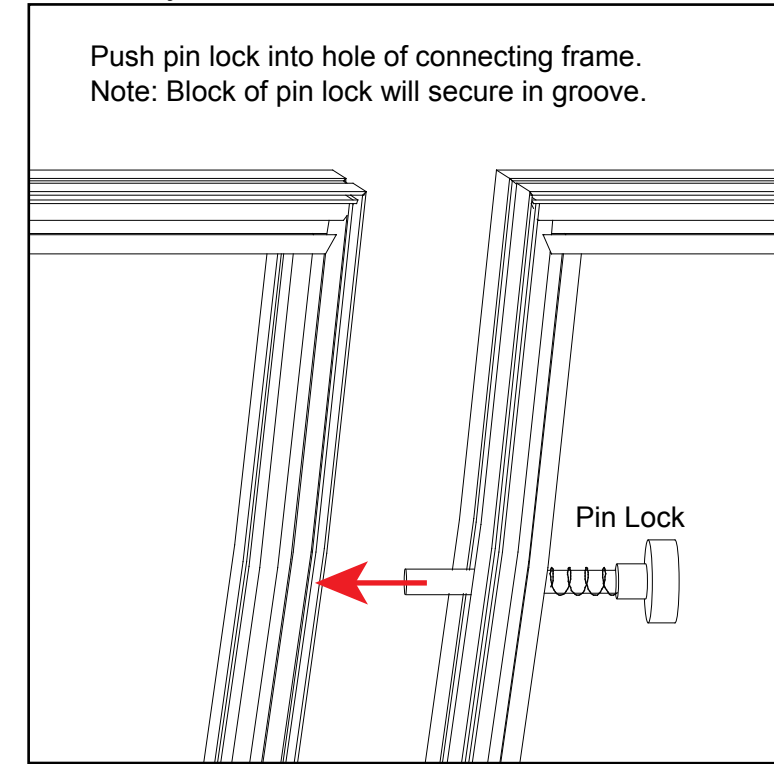

Corner Connector



Top View
Note: Orientation of Corner Connector may change.


Stacking Assembly

- 1) Place one horizontal frame on top of the other, lining up the center grooves.
- 2) Turn stacking lock clockwise to tighten into place. Repeat for each lock.


Stacking Disassembly

- 1) Turn the stacking lock counter-clockwise to loosen.
- 2) The whole spring on the stacking lock should be in view to release each frame. The disengaged spring should release the stacking lock. If not, keep turning the stacking lock until it disengages.

Stacking

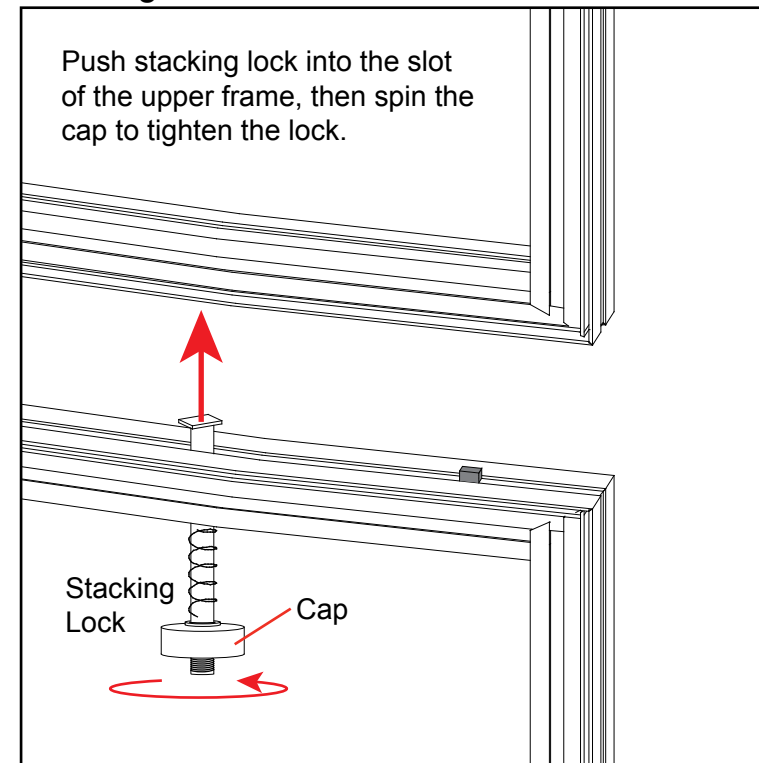



Unstacking

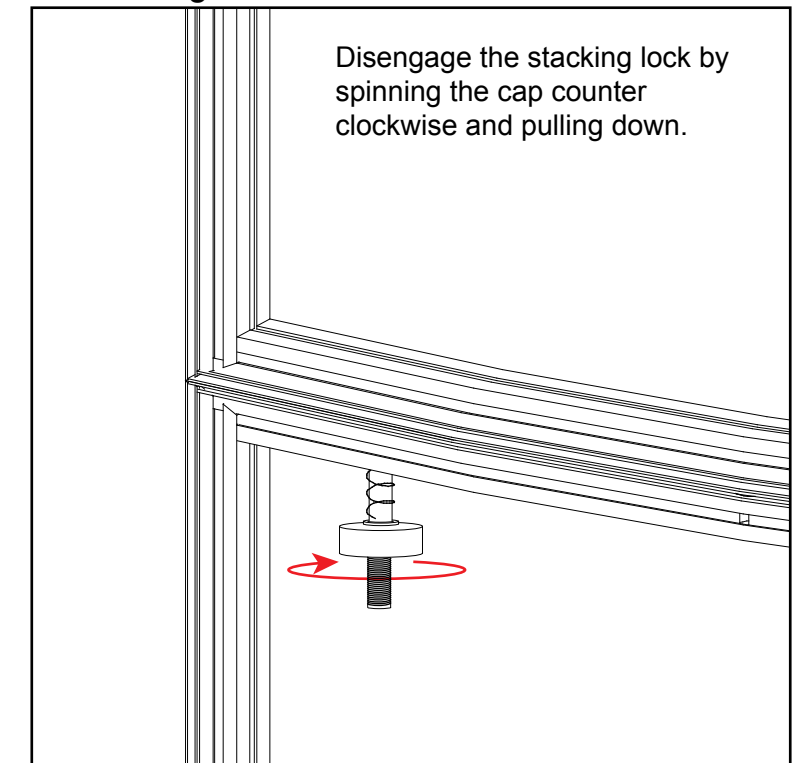

Straight Connection

When assembling frame, first attach all **straight connectors**, then attach **corner connectors**.

- 1) Place extrusions end-to-end.
- 2) Loosen all knobs, then slide **straight connectors** across the seam of extrusions.
- 3) Tighten all knobs to secure connection.

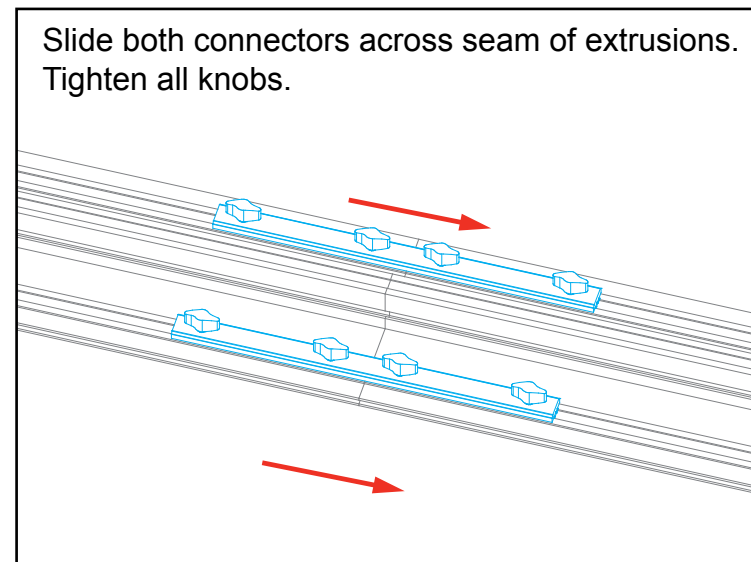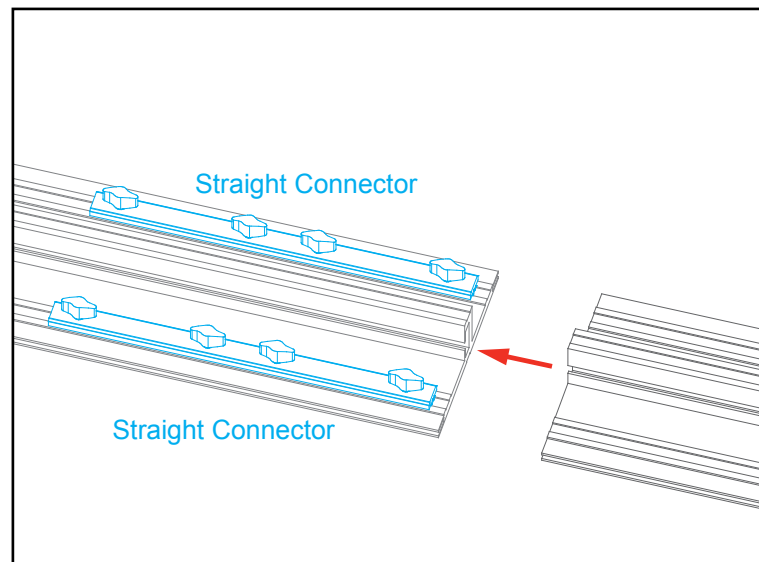

All knobs must be tightened securely to ensure a proper connection.

Disassembly

- 1) Loosen all knobs.
- 2) Slide connectors off of one extrusion.
- 3) Tighten knobs to prevent loss during packing & shipping.


Keep straight connectors in groove of extrusion. Do not remove connectors during disassembly.

Corner Connection


- 1) Loosen knobs, then slide vertical extrusions onto **corner connectors** of **lower** horizontal extrusion.
- 2) Slide **corner connectors** of **upper** horizontal extrusion into grooves of vertical extrusions.
- 3) Tighten all knobs to secure connection.

Disassembly

- 1) Loosen knobs on vertical extrusions.
- 2) Slide the vertical extrusions off of **corner connectors** on lower and upper horizontal extrusions.

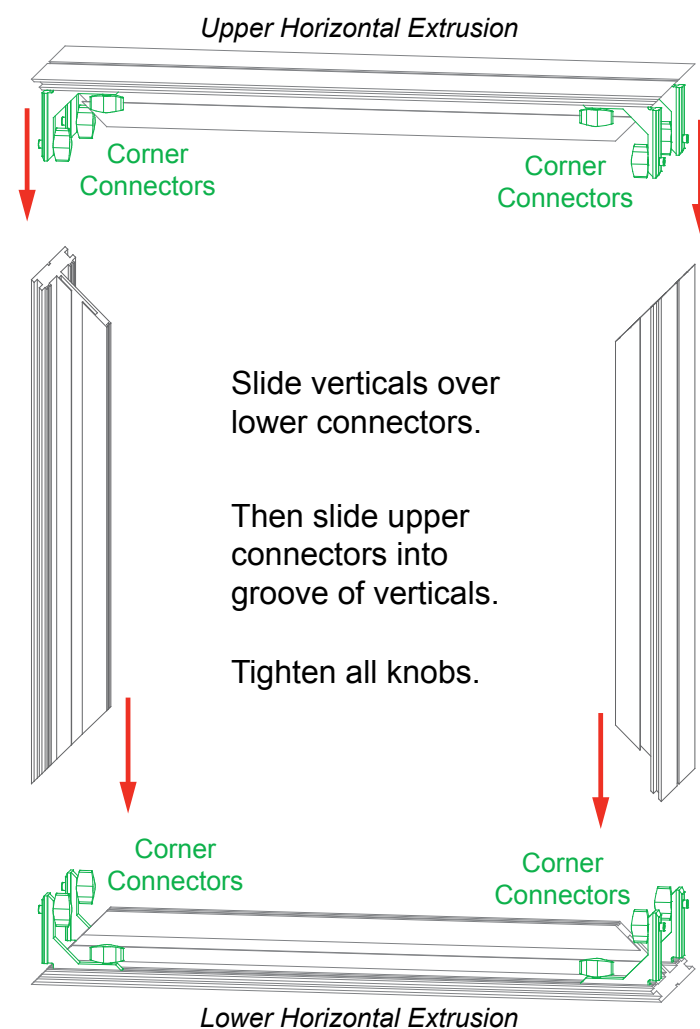


Adjust connectors if necessary to prevent gaps in connection.

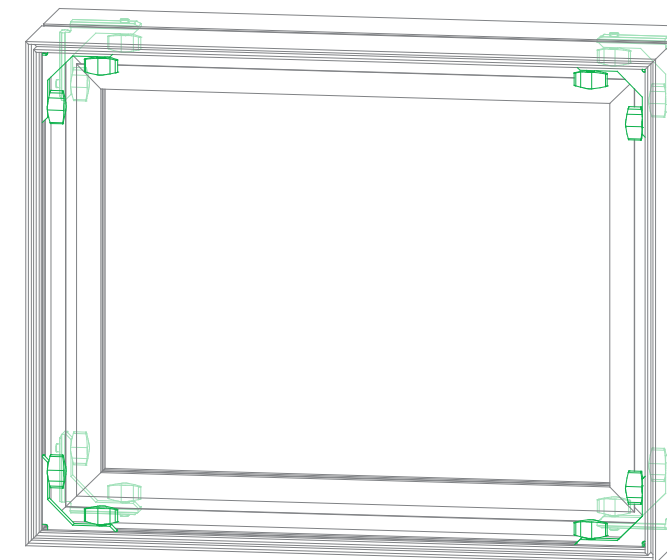

COMPLETED ASSEMBLY

All knobs must be tightened securely to ensure a proper connection.


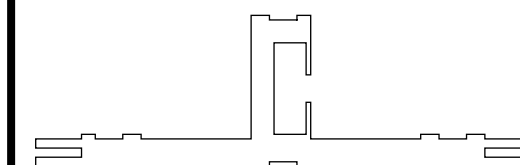


CEI152 Profile

Straight Connection

When assembling frame, first attach all **straight connectors**, then attach **corner connectors**.

- 1) Place extrusions end-to-end.
- 2) Loosen all knobs, then slide **straight connectors** across the seam of extrusions.
- 3) Tighten all knobs to secure connection.

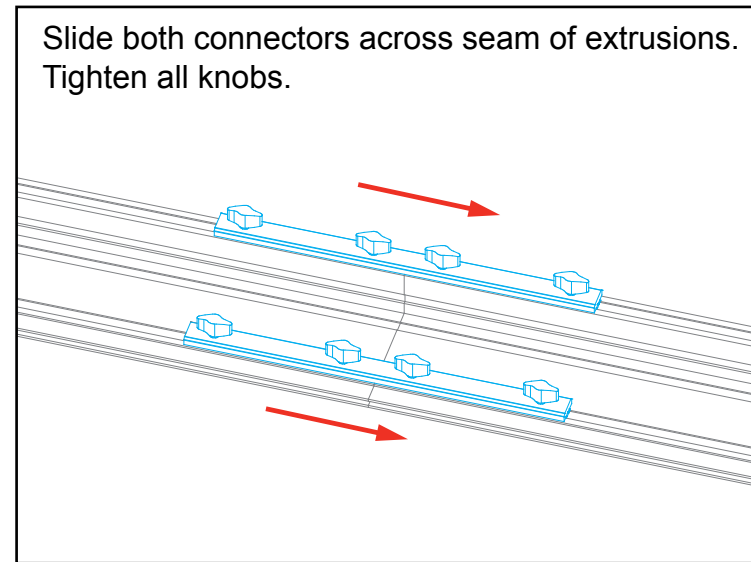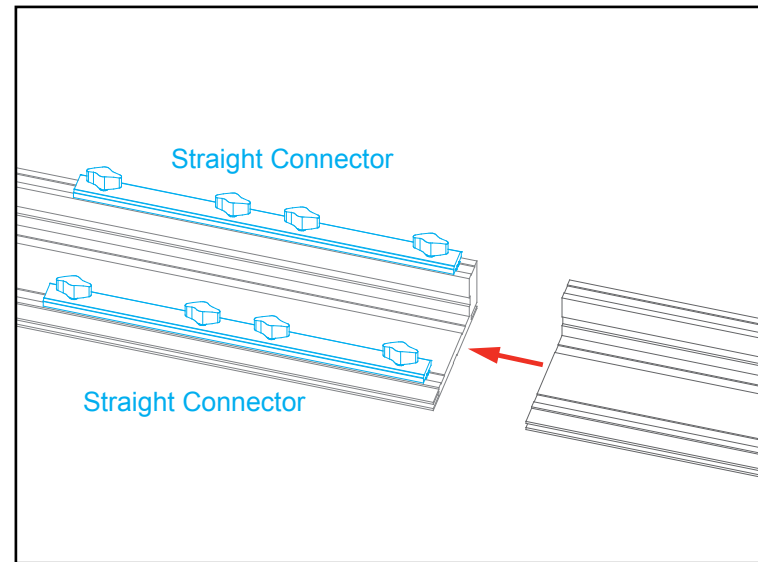

All knobs must be tightened securely to ensure a proper connection.

Disassembly

- 1) Loosen all knobs.
- 2) Slide connectors off of one extrusion.
- 3) Tighten knobs to prevent loss during packing & shipping.


Keep straight connectors in groove of extrusion. Do not remove connectors during disassembly.

Corner Connection


- 1) Loosen knobs, then slide vertical extrusions onto **corner connectors** of **lower** horizontal extrusion.
- 2) Slide **corner connectors** of **upper** horizontal extrusion into grooves of vertical extrusions.
- 3) Tighten all knobs to secure connection.

Disassembly

- 1) Loosen knobs on vertical extrusions.
- 2) Slide the vertical extrusions off of **corner connectors** on lower and upper horizontal extrusions.

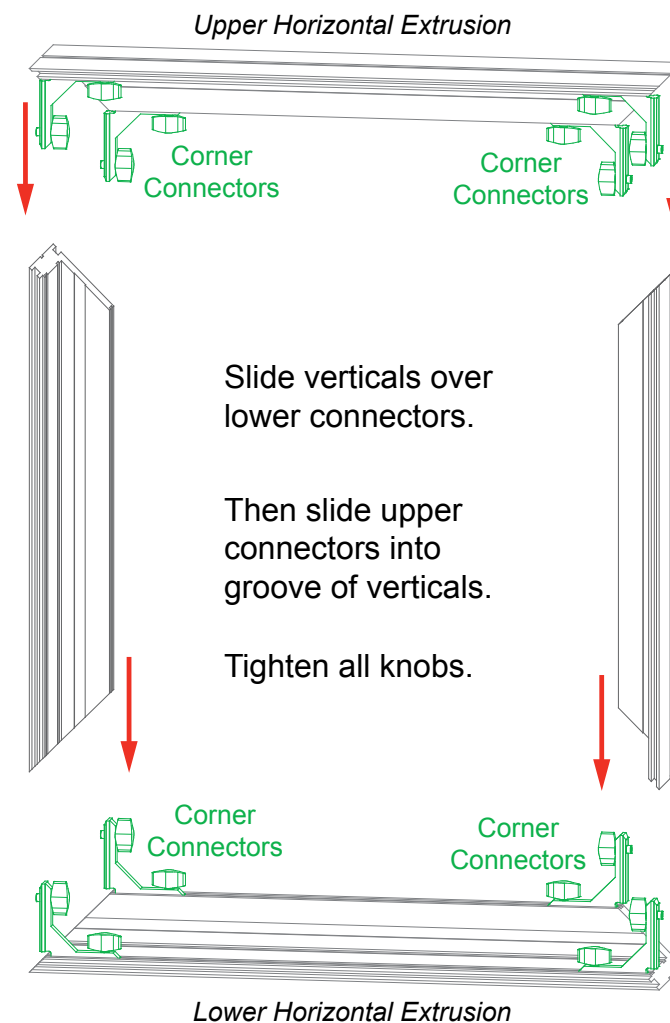


Adjust connectors if necessary to prevent gaps in connection.

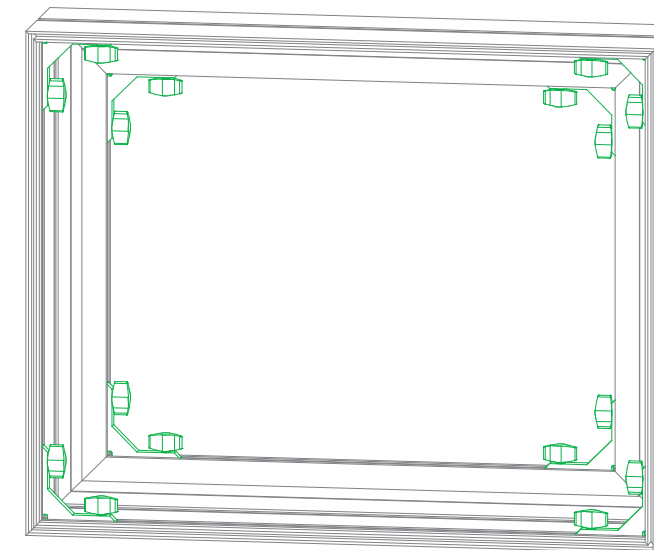


COMPLETED ASSEMBLY


All knobs must be tightened securely to ensure a proper connection.

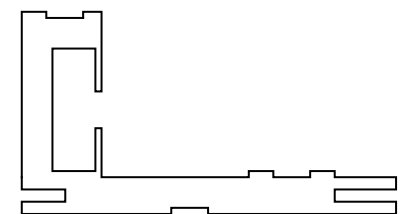

CEI110 Profile

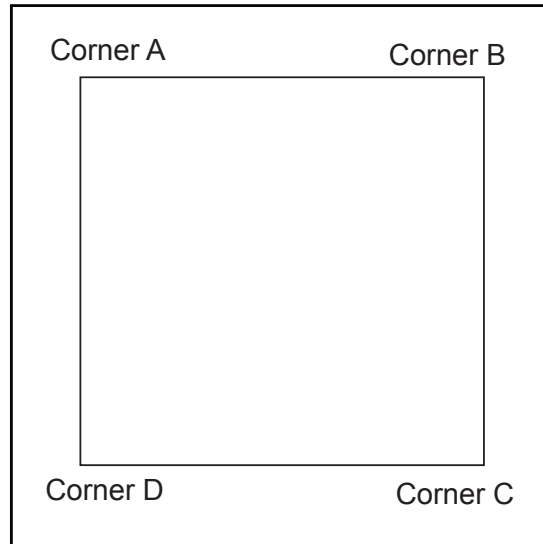

It is important to first insert graphic into each alternate corner then to the sides of the frame. If this is not done, graphic will not fit into the frame correctly.

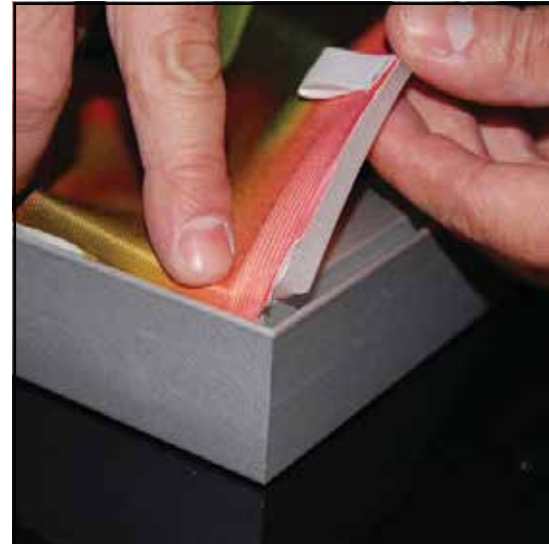

Step 1
Insert corner A. Turn edge of graphic so silicon welt is perpendicular to face of graphic. Insert narrow side of welt with fabric to outside into the channel. Repeat for other side of this corner.




Step 2
Repeat Step 1 for opposite corner C, then insert corner B, followed by corner D, to complete the installation of the corners.



Step 3
Once all corners are inserted, press one silicon edge into channel from corners and work toward the center. Make sure welt is fully inserted into channel. Continue until all sides are done. Smooth out edges of graphic.

Graphic Removal

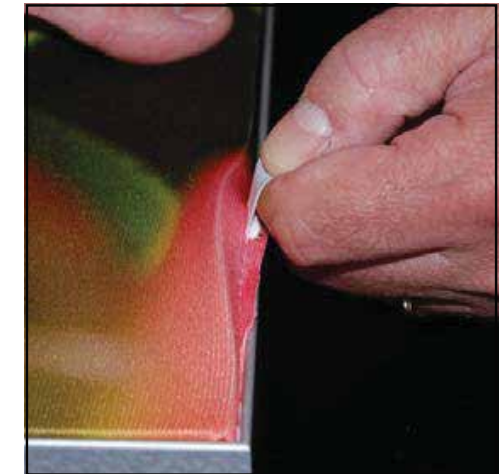

To remove the graphic from the frame, locate the fabric pull tab. Gently pull up on the tab to remove the fabric.


CRATE PACKING

Item	Qty.	Description
2	1	95"h CEI152 Vertical Extrusion
4	1	95"h CEI152 Vertical Extrusion
6	1	48"w CEI152 Horizontal Extrusion
7	1	48"w CEI152 Horizontal Extrusion
8	1	44.353"w Z45 Horizontal Extrusion
9	1	72"h Z45 Vertical Extrusion
10	1	72"h Z45 Vertical Extrusion

Steps:


Refer to the CEI152 Frame Assembly general information page.

- 1) Assemble verticals [2,4] between horizontals [6,7] using corner connectors.
- 2) Connect horizontal [8] between verticals [2,4].
- 3) Attach verticals [9,10] between horizontals [6,8].

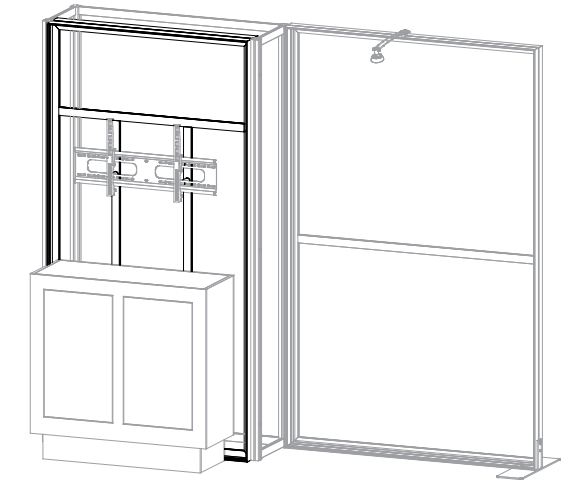

Section Being Assembled is Highlighted in BLACK

Assemble frame flat on ground.

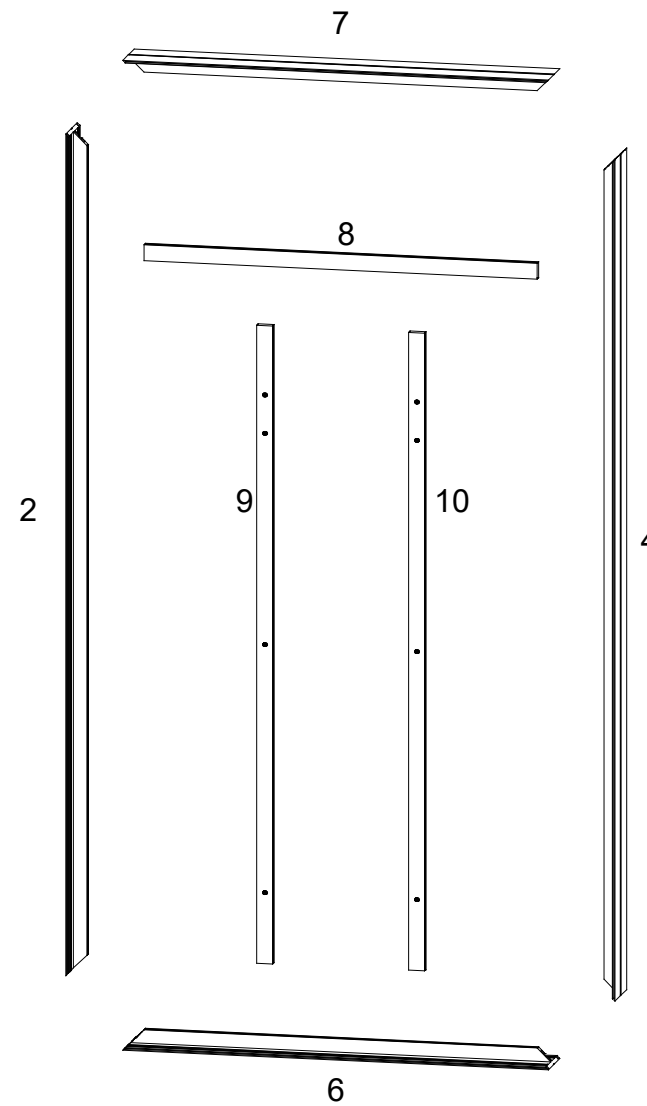


FRONT VIEW




Item	Qty.	Description
17	1	95”h S44 Vertical Extrusion
18	1	95”h S44 Vertical Extrusion
19	1	95”h S44 Vertical Extrusion
20	1	95”h S44 Vertical Extrusion
21	1	48”w Z45 Horizontal Extrusion
22	1	48”w Z45 Horizontal Extrusion
23	1	14”w Z45 Horizontal Extrusion
24	1	14”w Z45 Horizontal Extrusion
25	1	14”w Z45 Horizontal Extrusion
26	1	14”w Z45 Horizontal Extrusion

Steps:

- 1) Connect horizontals [21,22] between verticals [18,19].
- 2) Attach lower horizontal [23] between verticals [17,18]; insert **Infill** & secure by attaching upper horizontal [24] between verticals [17,18].
- 3) Attach lower horizontal [25] between verticals [19,20]; insert **Infill** & secure by attaching upper horizontal [26] between verticals [19,20].
- 4) Attach front frame verticals [2,4] to closet verticals [17,20] using bolts & V4 connectors. See **Bolt to V4 Connection** detail.

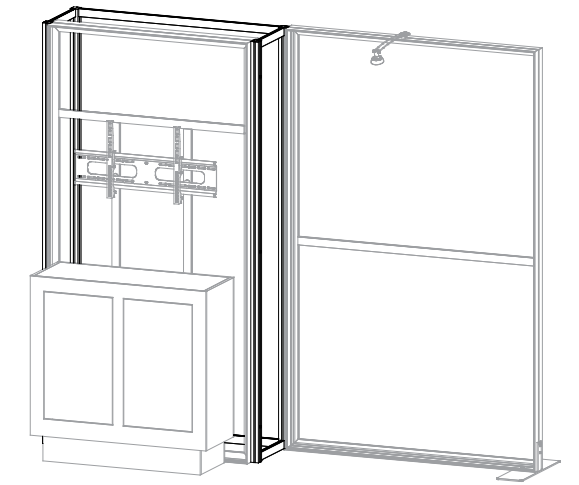

Section Being Assembled is Highlighted in BLACK

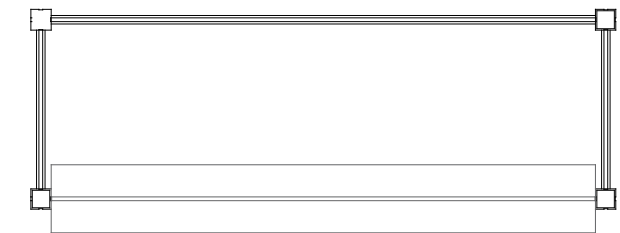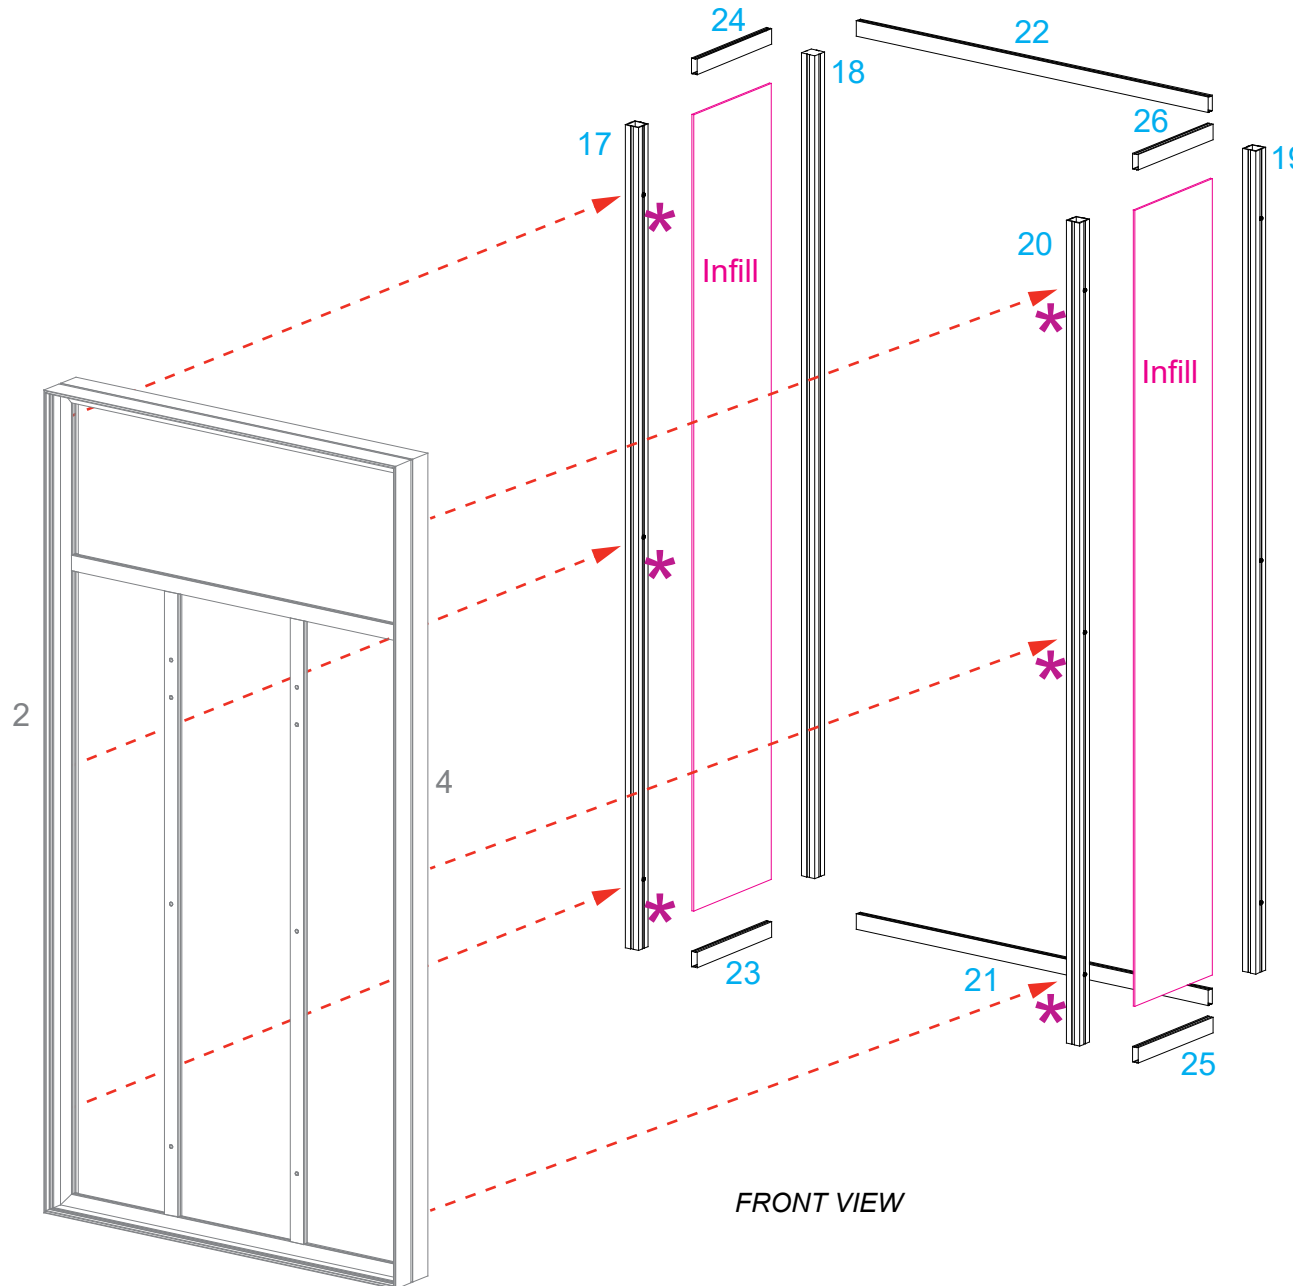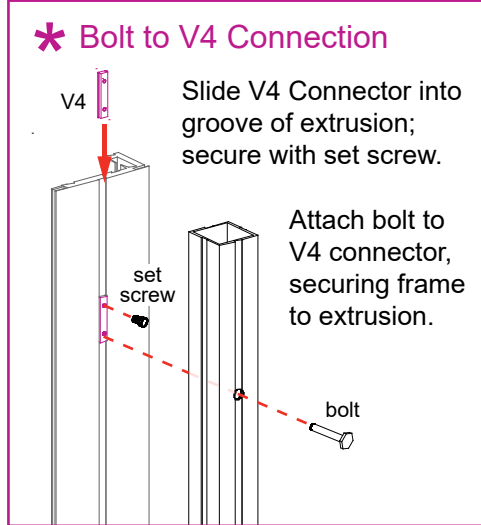

TOP VIEW


Item	Qty.	Description
11	1	95"h CEI110 Vertical Extrusion
12	1	95"h CEI110 Vertical Extrusion
13	1	60"w CEI110 Horizontal Extrusion
14	1	60"w CEI110 Horizontal Extrusion
15	1	56.535"w Z45 Horizontal Extrusion
16	1	Base Plate w/ flange

Steps:




Refer to the CEI110 Frame Assembly general information page.

- 1) Assemble verticals [11,12] between horizontals [13,14], using corner connectors.
- 2) Connect horizontal [15] between verticals [11,12].
- 3) Attach Base Plate [16] to corner of assembly as shown.
See **Base Plate Attachment** detail.
- 4) Attach vertical [11] to closet vertical [19] using bolts & V4 connectors.
See **Bolt to V4 Connection** detail.


Assemble frame flat on ground.

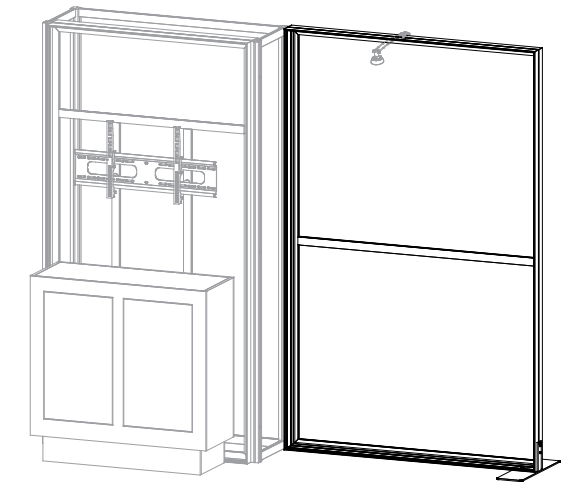

Section Being Assembled is Highlighted in BLACK

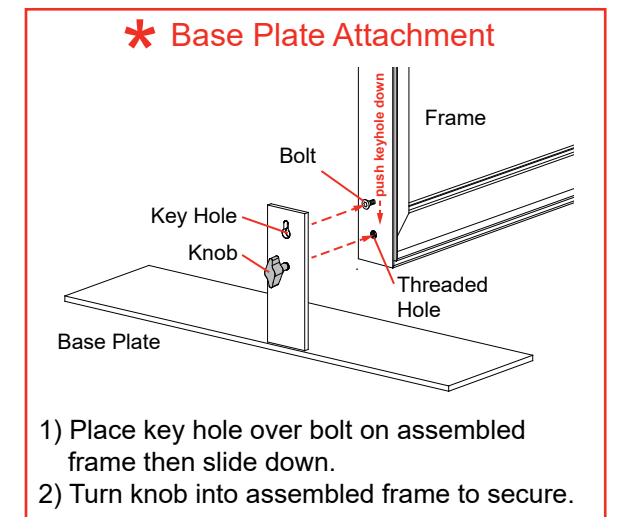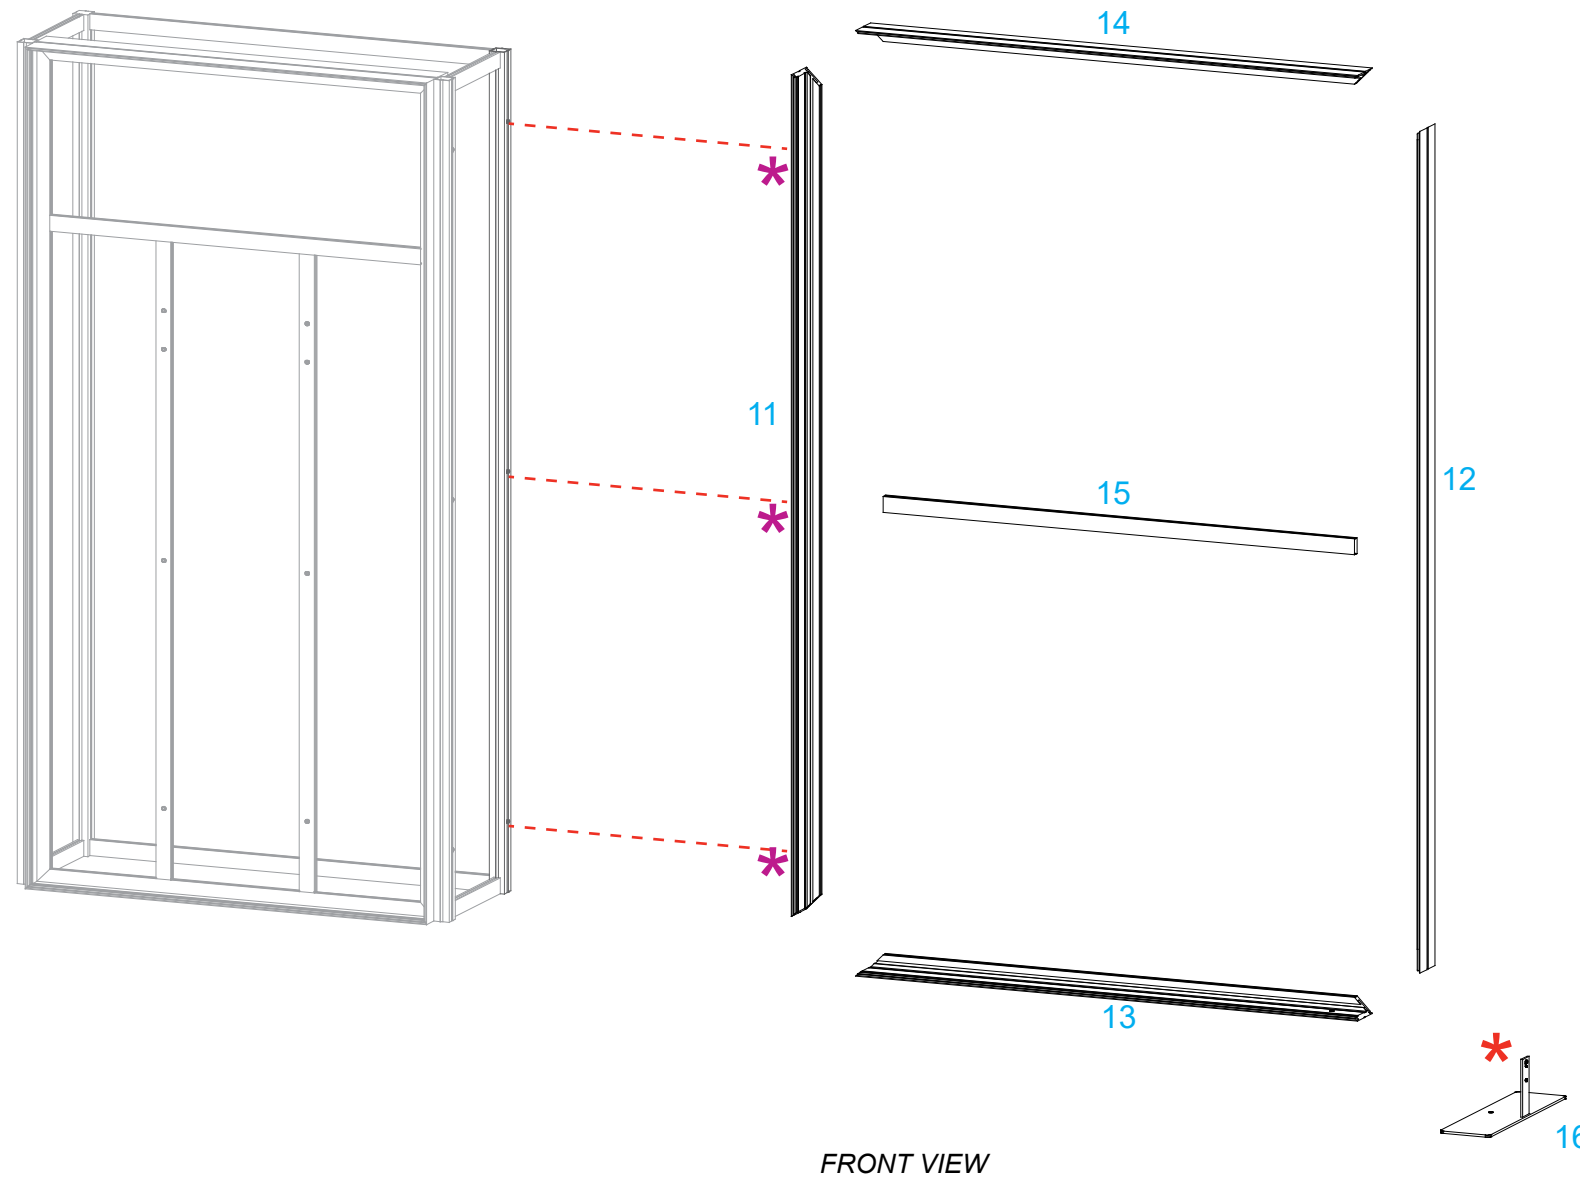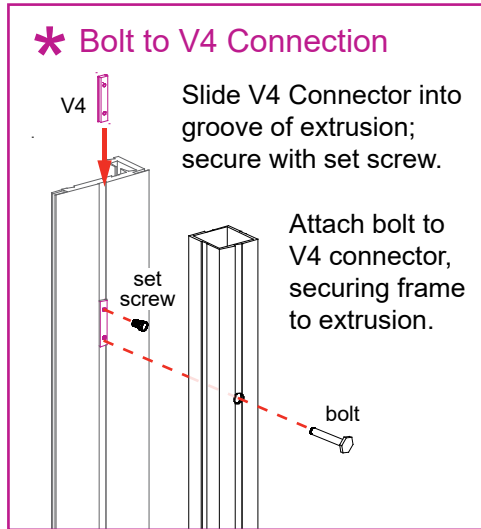

SEG Graphic Installation

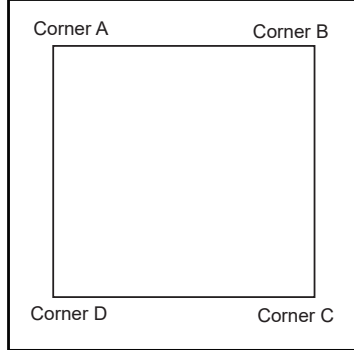

It is important to first insert graphic into each alternate corner, then to the sides of the frame. If this is not done, graphic will not fit into the frame correctly.

Step 1
Insert corner A. Turn edge of graphic so silicon welt is perpendicular to face of graphic. Insert narrow side of welt with fabric to outside into the channel. Repeat for other side of this corner.



Step 2
Repeat Step 1 for opposite corner C, then insert corner B, followed by corner D, to complete the installation of the corners.



Step 3
Once all corners are inserted, press one silicon edge into channel from corners and work toward the center. Make sure welt is fully inserted into channel. Continue until all sides are done. Smooth out edges of graphic.




Graphic Removal
To remove the graphic from the frame, locate the fabric pull tab. Gently pull up on the tab to remove the fabric.


Item	Qty.	Description
--	1	42"w x 16"d x 42"h Kiosk Counter

Steps:

- 1) Apply SEG graphics to front & side frames, as shown.
- 2) Connect counter to verticals [9,10] of front frame assembly, using Standoff Barrels. See [Standoff Barrel Attachment](#) detail.

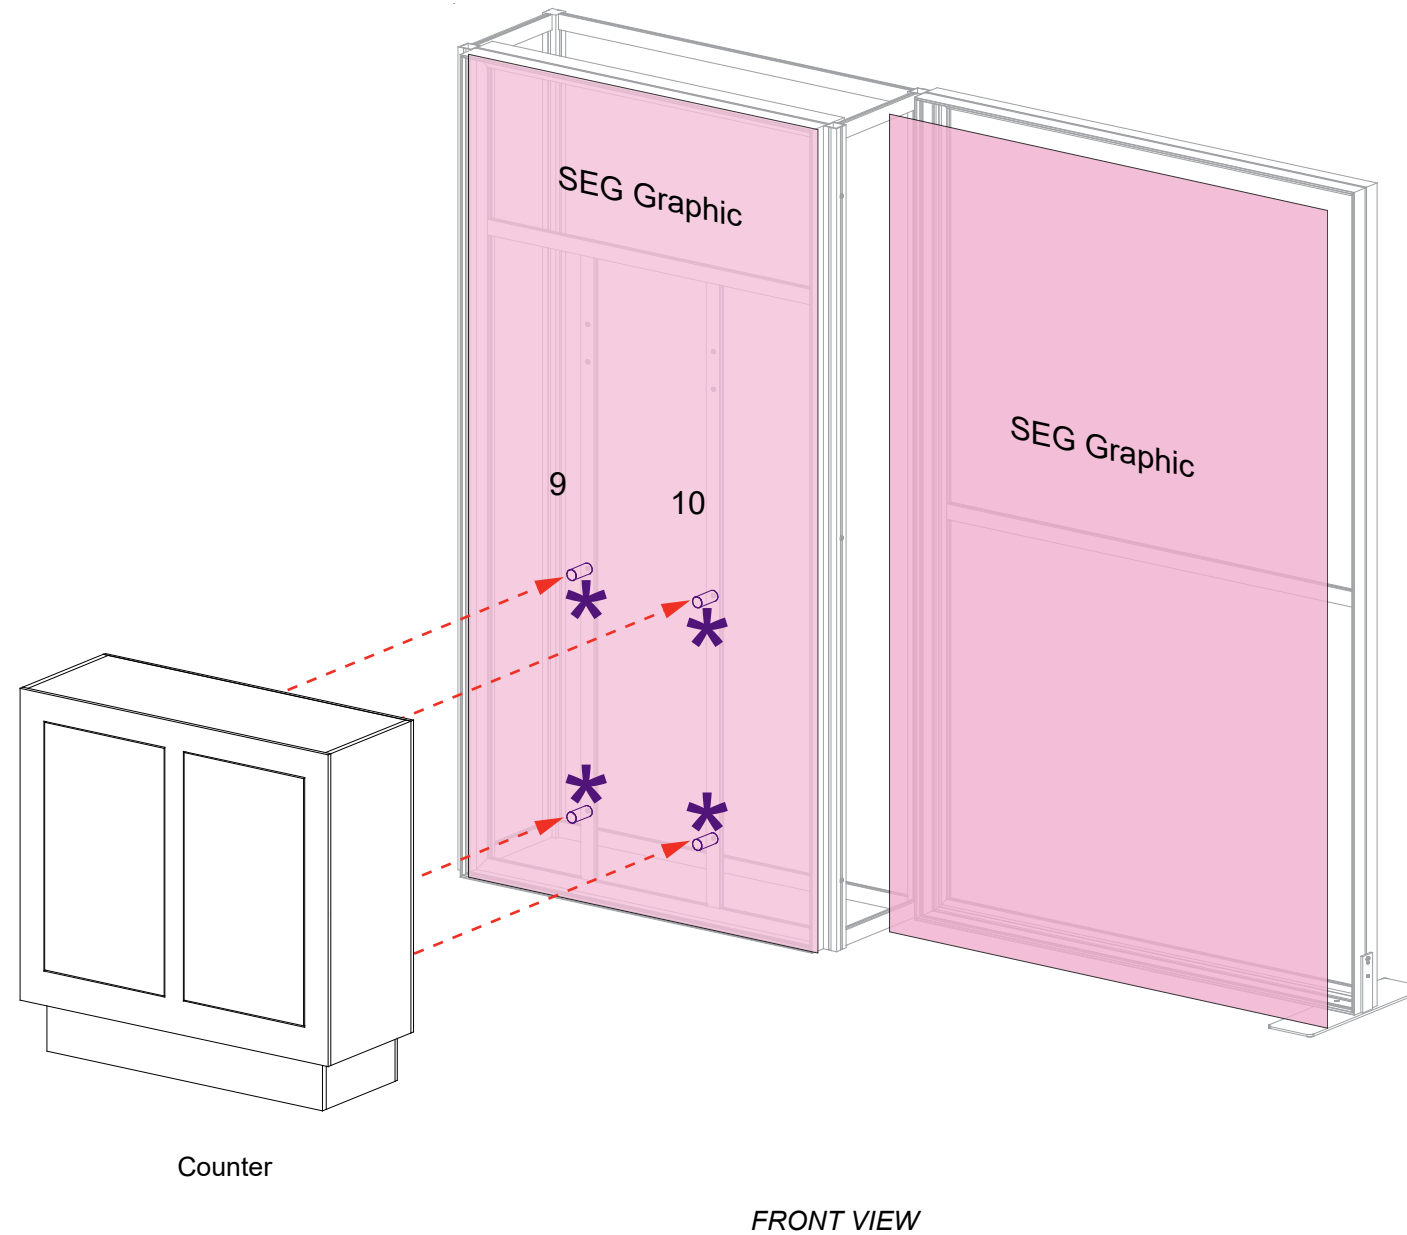


*** Standoff Barrel Attachment**

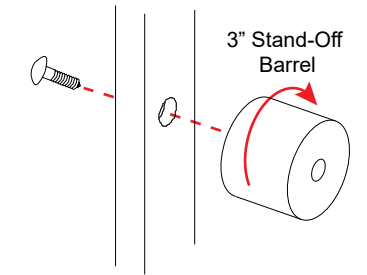

Secure Counter to vertical extrusion using standoff barrels.

Steps:

- 1) Attach Monitor Mount to verticals [9,10] of front frame assembly.
See **Monitor Mount Attachment** detail.
- 2) Attach light to top of backwall where shown.
See **Light Attachment** detail.

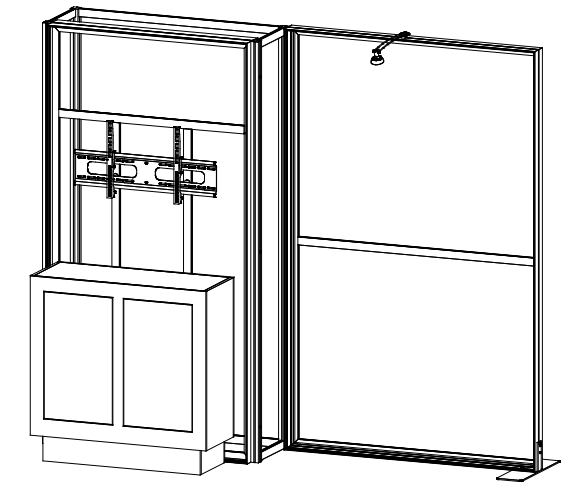


Completed Assembly

*** Monitor Mount Attachment**
Attach Stand-off barrels to Z45 extrusions & secure with wing nuts.

Monitor Mount
Z45
Bolts
SEG Graphic

Connect Monitor Mount to Standoff Barrels using Bolts.

Note: Monitor mounts install through SEG graphic.

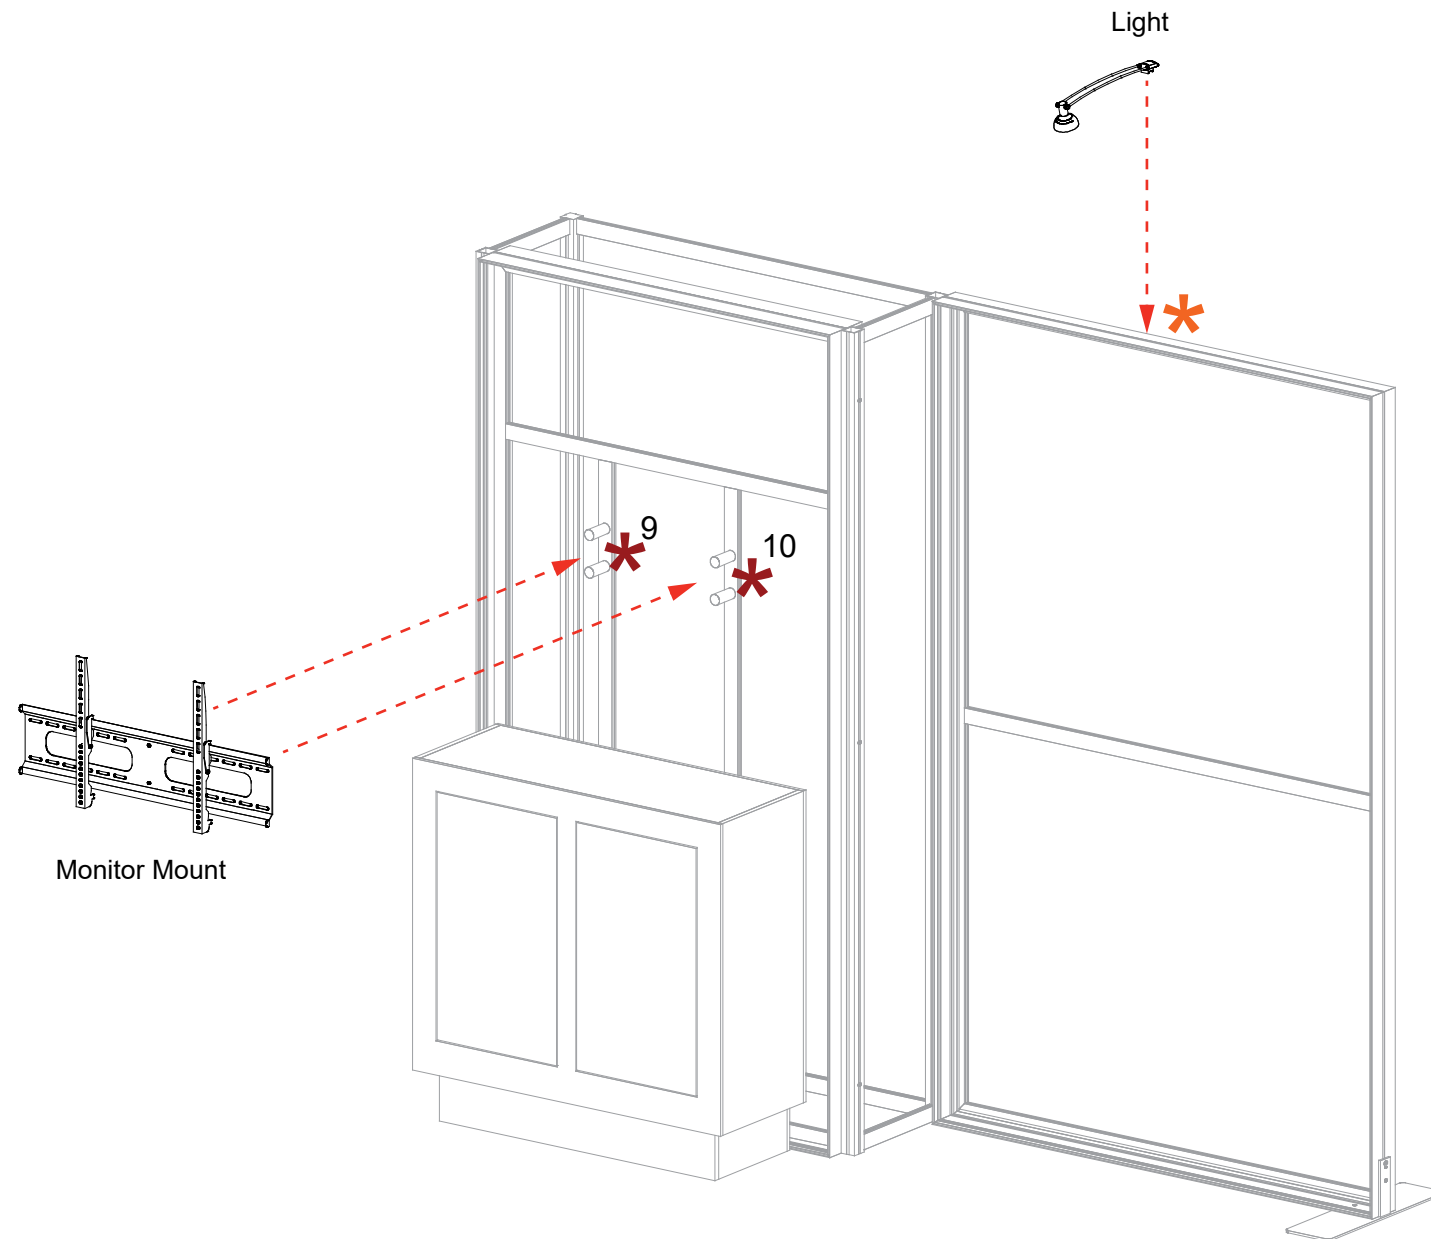





*** Light Attachment**


Lock Clip into Groove of Horizontal Extrusion, then slide Light onto Clip.

Lock into groove of horizontal

Slide light into light receiving hardware

- Steps:
1) Attach graphic to front of counter, using standoff barrels as shown.

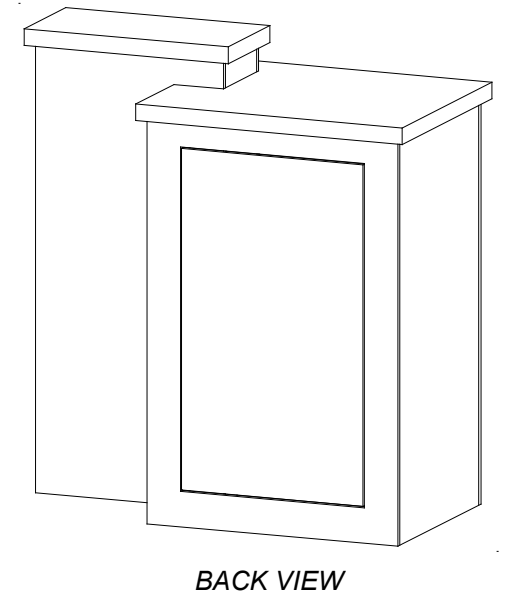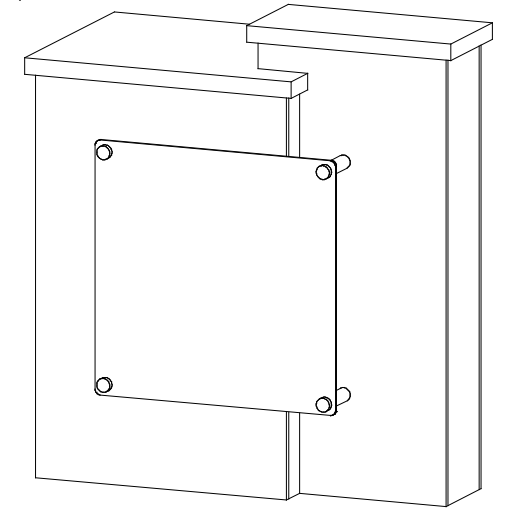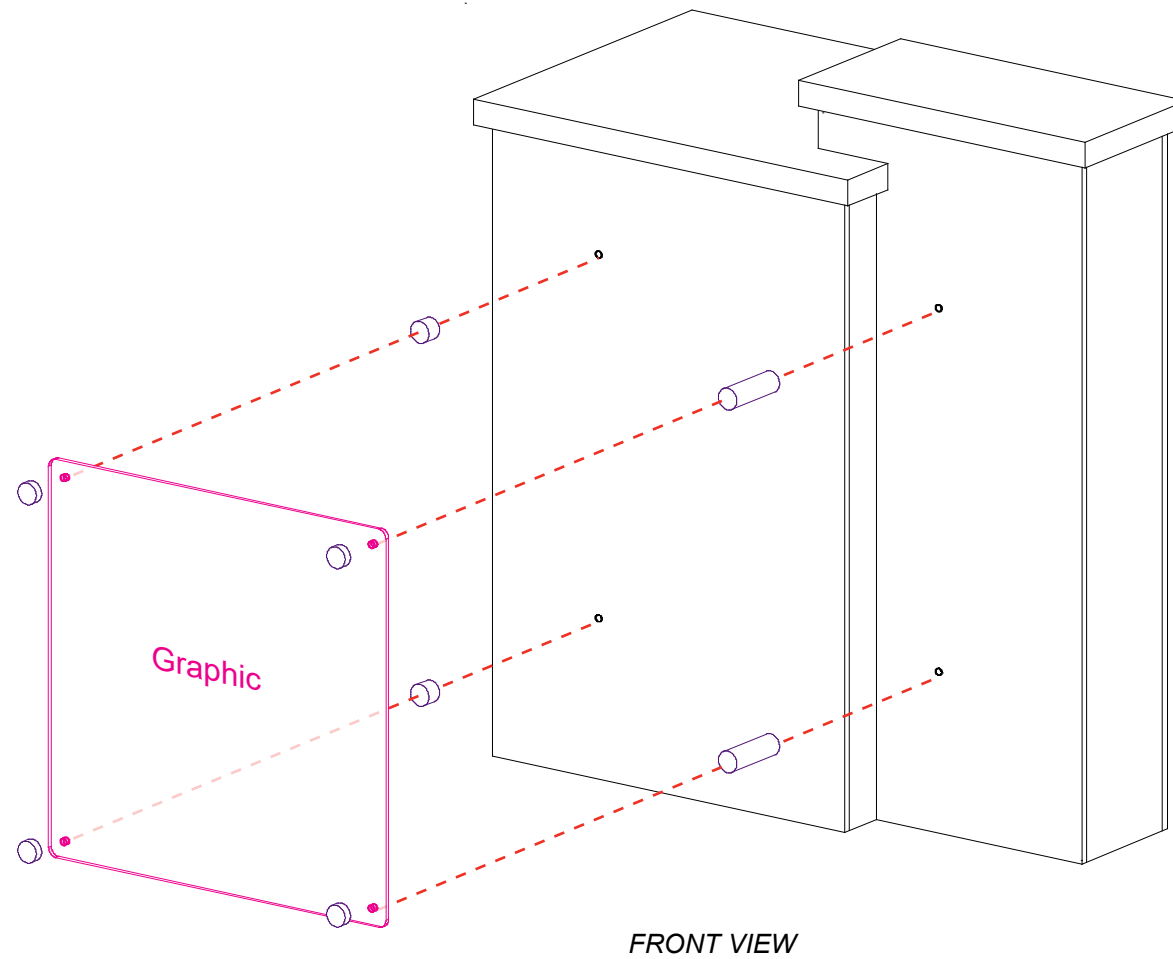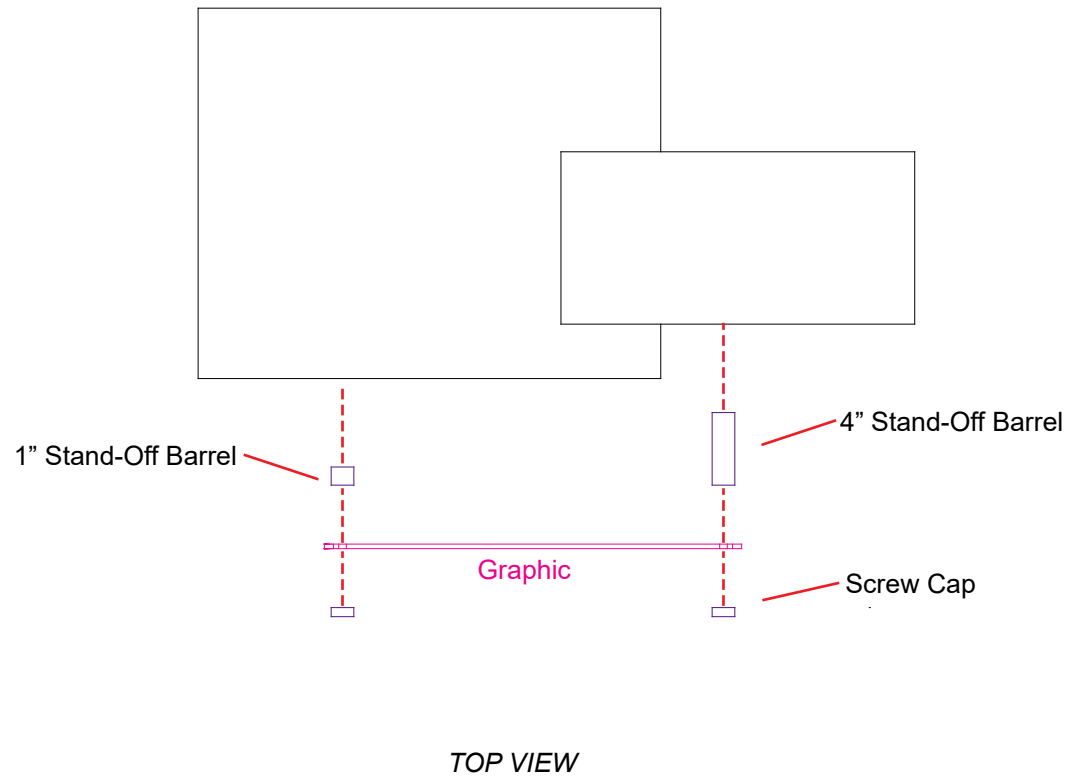


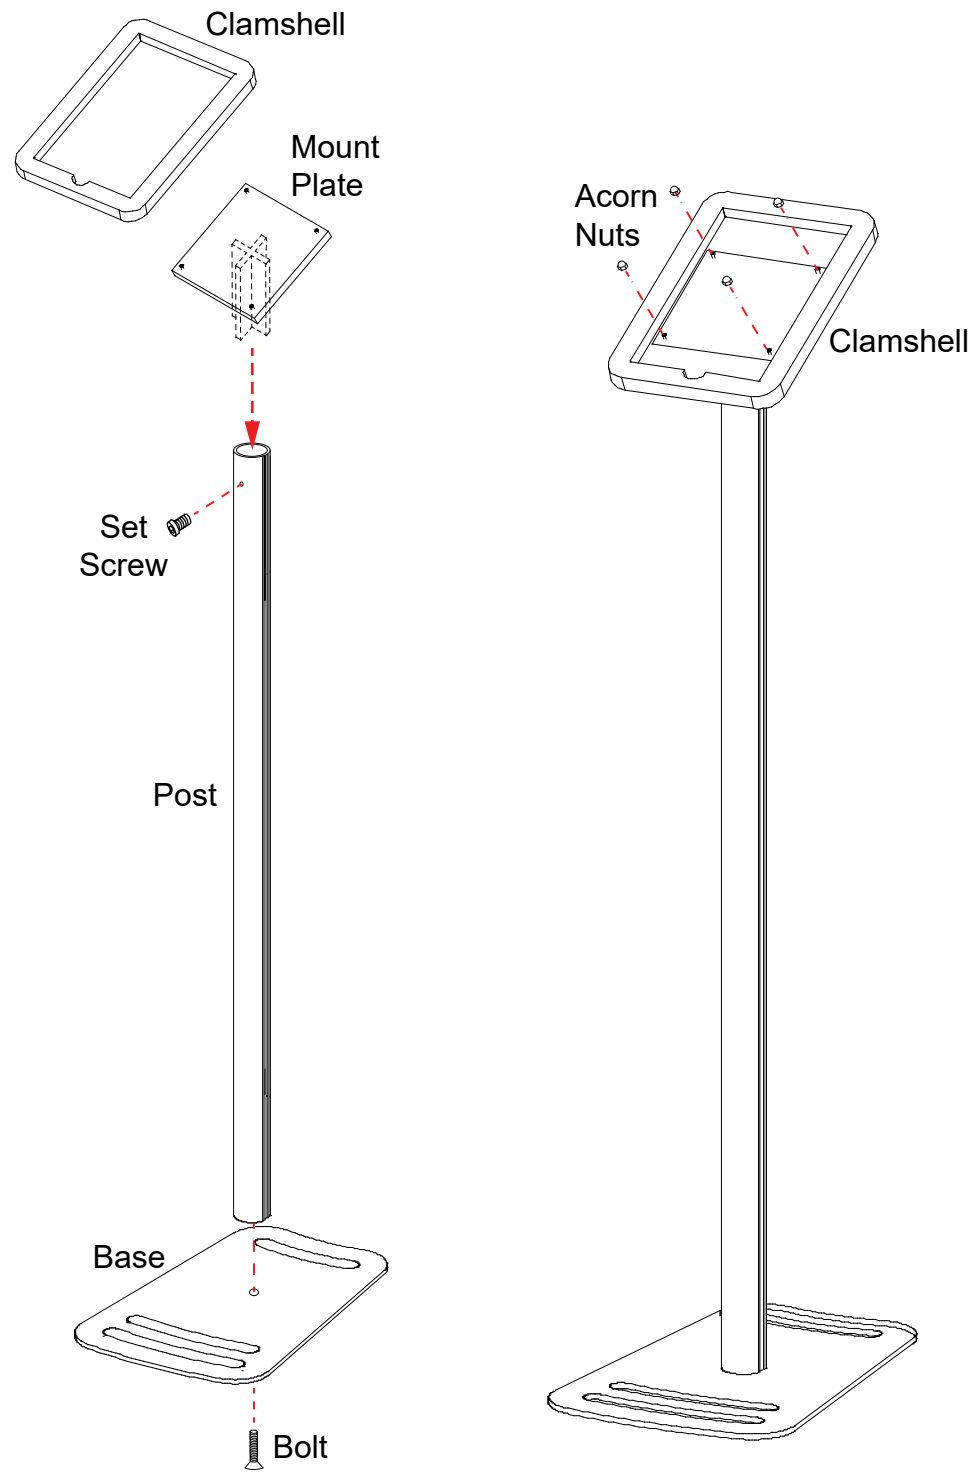

Steps:

- 1) Attach base to post, using bolt.
 - 2) Attach mount plate to post, using set screw.
 - 3) Attach clamshell to mount plate, using acorn nuts.
 - 4) Insert iPad into clamshell, then route cords through holes in post.
- NOTE: Mount plate must rotate left and right, before installing clamshell.**
- See [Cord Management For iPad](#) detail.


Optional Cover for Home Button

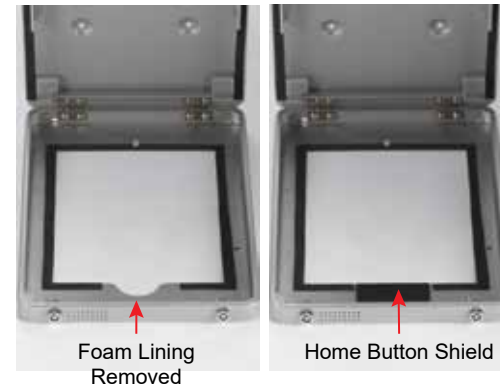

- 1) Remove foam lining from inside bottom of clamshell.
- 2) Attach Home Button Shield with double-sided tape to inside of clamshell, keeping top of shield flush with clamshell opening.

NOTE: This is a permanent fix and can't be easily removed.

Cord Management for iPad

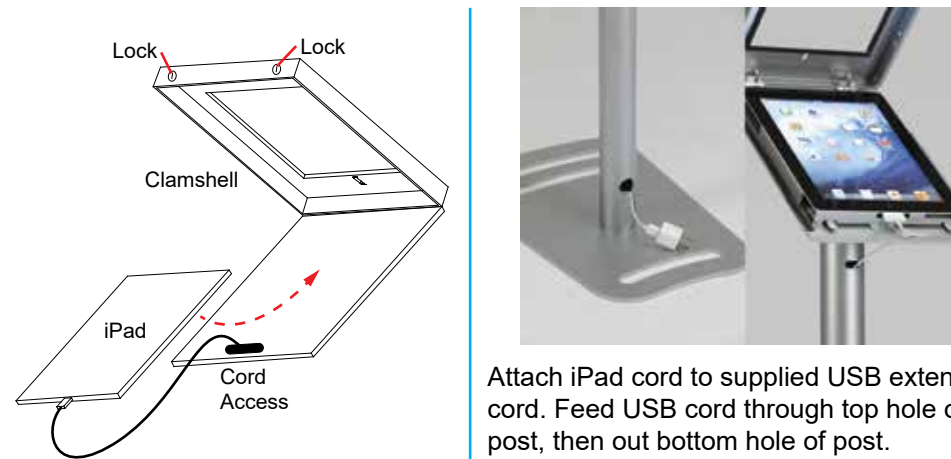

Attach iPad cord to supplied USB extension cord. Feed USB cord through top hole of post, then out bottom hole of post. Connect to power.

Rotate clamshell to turn iPad from portrait to landscape orientation.

